

How to change: Fiat Doblo Cargo air filter – replacement guide

 VIDEO TUTORIAL

Important!

This replacement procedure can be used for:
FIAT DOBLO Cargo (223_) 1.3 D Multijet, FIAT FIORINO Box Body/Estate (225_) 1.3 D Multijet (225BXD1A, 225BXB1A, 225BXB11), FIAT GRANDE PUNTO (199_) 1.3 D Multijet, FIAT PUNTO (199_) 1.3 D Multijet, FIAT PUNTO EVO (199_) 1.3 D Multijet (199AXC1A, 199BXC1A, 199AXT1A, 199BXT1A), FIAT QUBO (225_) 1.3 D Multijet (225CXB1A, 225AXB1A, 225CXB11, 225AXB11,...

The steps may slightly vary depending on the car design.



REPLACEMENT: AIR FILTER – FIAT DOBLO CARGO. LIST OF THE TOOLS YOU'LL NEED:



- Drive socket # 8
- Ratchet wrench
- Microfibre towel
- Fender cover

Replacement: air filter – Fiat Doblo Cargo. Tip from AUTODOC experts:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.


REPLACEMENT: AIR FILTER – FIAT DOBLO CARGO. RECOMMENDED SEQUENCE OF STEPS:

1



Open the bonnet.

2

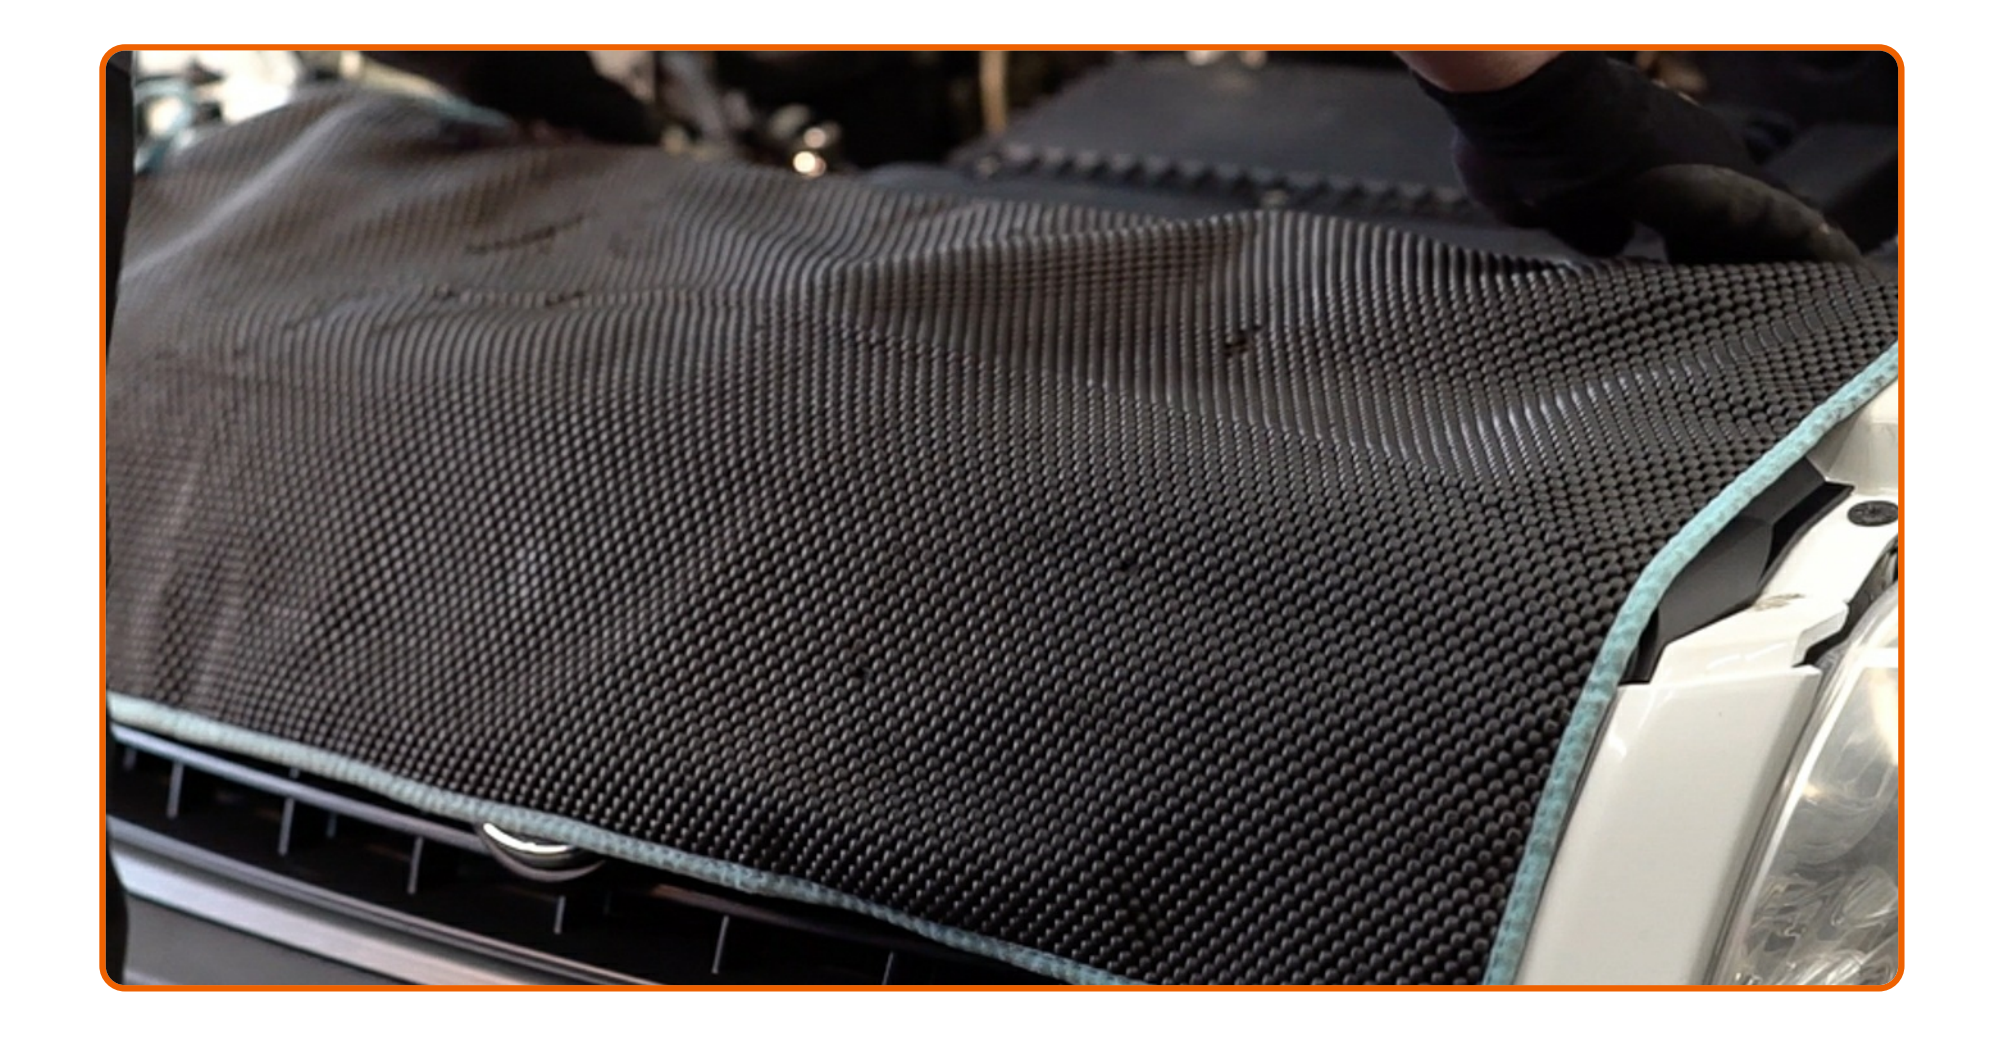

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3



Undo the fastening screws of the air filter cover. Use a drive socket #8. Use a ratchet wrench.

4



Take off the filter lid.

5



Remove the filter element from the filter housing.

6



Clean the air filter cover and housing.

Replacement: air filter – Fiat Doblo Cargo. Tip:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

7



Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



Replacement: air filter – Fiat Doblo Cargo. AUTODOC experts recommend:

- Check out the correct location of the filter element. Do not skew.
- Fiat Doblo Cargo – It's important to only use high-quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

8



Reinstall the air filter cover. Fasten it.

9



Screw in the fastening screws of the air filter cover. Use a drive socket #8. Use a ratchet wrench.

10



Remove the fender protection cover.

11



Close the hood.

DID YOU FIND THESE INSTRUCTIONS HELPFUL?


YES NO



BECOME A MEMBER OF AUTODOC CLUB!

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

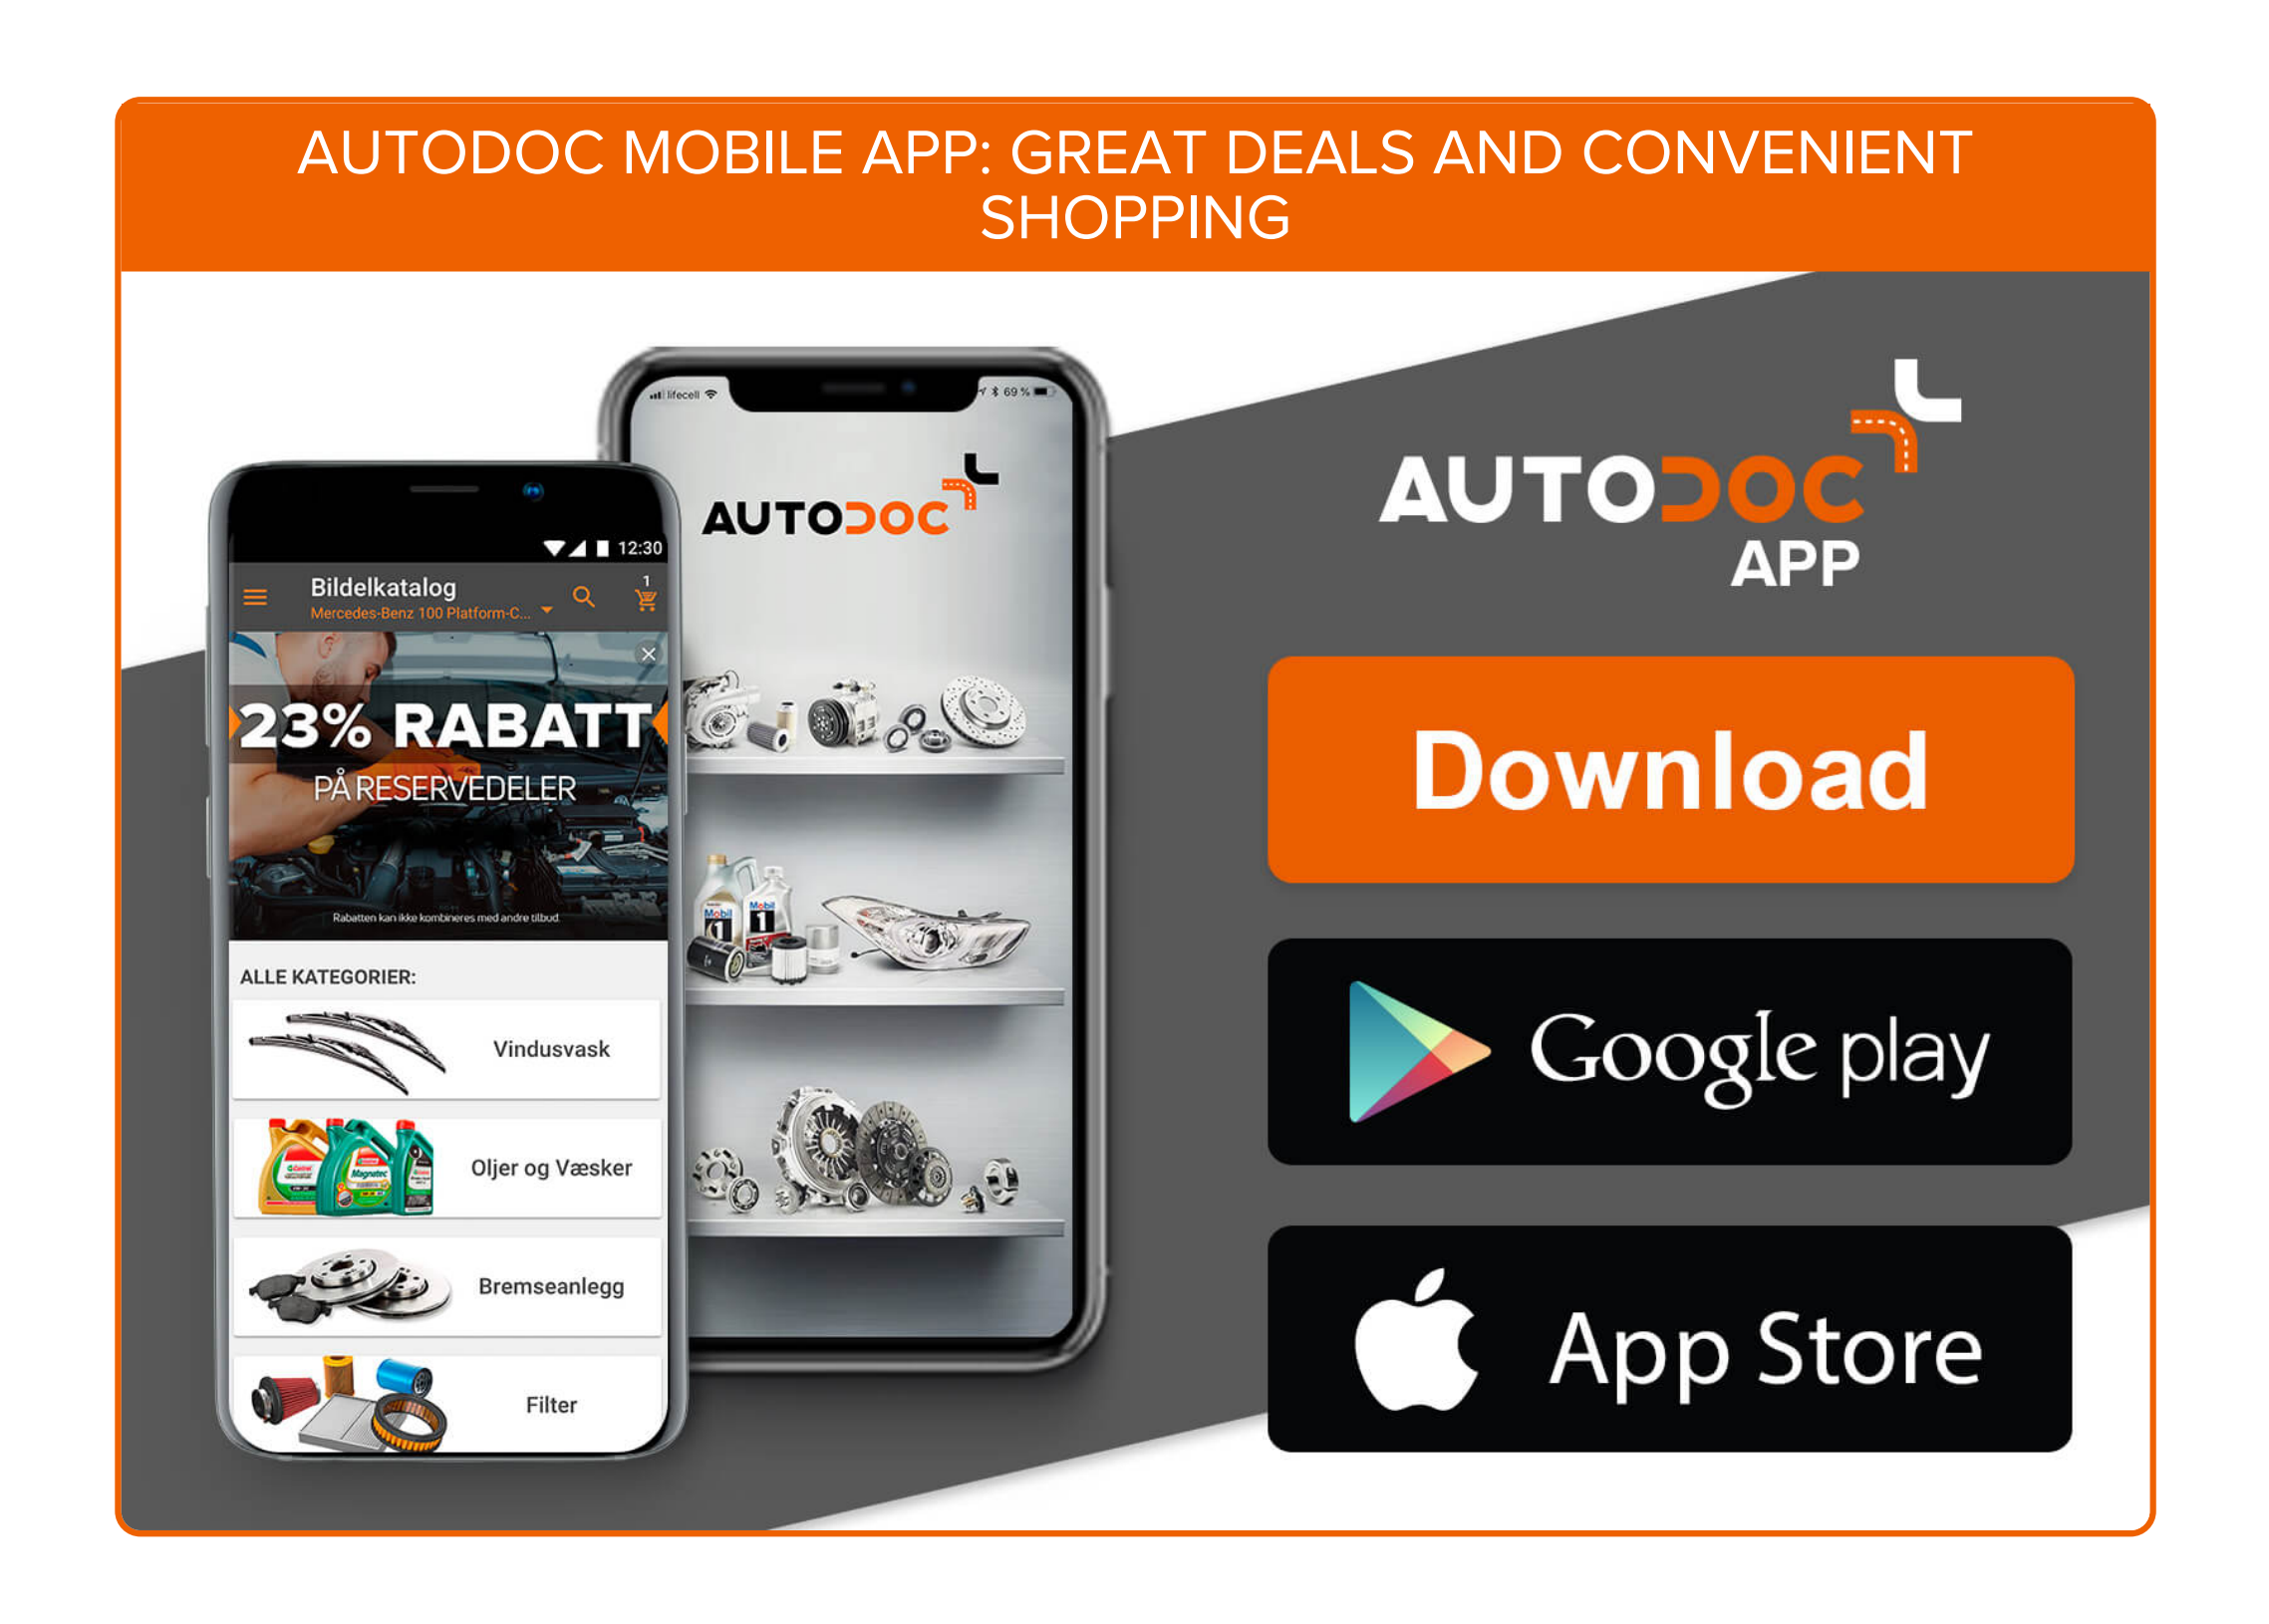

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR




BUY SPARE PARTS FOR FIAT


AIR FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR FIAT DOBLO CARGO



AIR FILTER FOR FIAT: BUY NOW





AIR FILTER FOR FIAT DOBLO CARGO: THE BEST DEALS & OFFERS



Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.